


Pendasfield

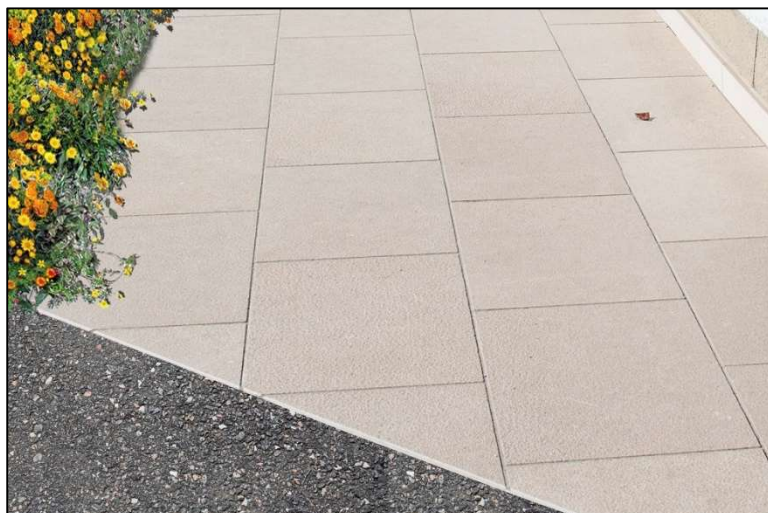

PRODUCT DESCRIPTION

Appearance	Light brown with crystalline texture
Petrographic Description	Sedimentary
Quarry Location	Turkey
Available Finishes	Sawn, Fine Picked, Flamed
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2002, BS EN 1342 : 2012, BS EN 1343 : 2012

PHYSICAL PROPERTIES

Work Dimensions (mm)	To Customer's Specification	
Tolerances on Dimensions (mm)	Class 2	
Material Density	2709 kg/m ³	BS EN 1936 : 2006
Compressive Strength	168 MPa	BS EN 1926 : 2006
Flexural Strength	19.5 MPa	BS EN 12372 : 2006
Abrasion Resistance	17.38mm	BS EN 14157 : 2017
Water Absorption	0.16%	BS EN 13755 : 2014
Slip Resistance	40.1 Dry	BS EN 14231 : 2004
	37.9 Wet	BS EN 14231 : 2004

Cleaning & Maintenance

All stones vary and each one should be assessed on an individual basis. Many are slightly alkali so acidic cleaners/cleaning solutions should be avoided. For further information please contact our technical department.