


Portland Whitbed

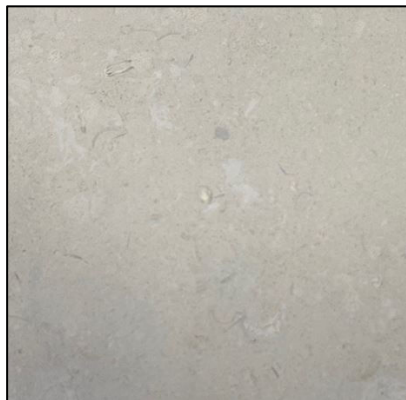

PRODUCT DESCRIPTION

Appearance	Grey/White
Petrographic Description	Open textured oolitic limestone in accordance with BS EN 12407:2007
Origin	Dorset, England, UK
Available Finishes	Sawn, Polished, Honed
Governing Manufacturing Standards	All data where relevant to be established in accordance with BS EN 1341 : 2002, BS EN 1342 : 2012, BS EN 1343 : 2012

PHYSICAL PROPERTIES

Work Dimensions (mm)	To Customer's Specification	
Tolerances on Dimensions (mm)	Class 2	
Material Density	2225 KG/m ³	BS EN 1936 : 2006
Compressive Strength	55 MPa	BS EN 1926 : 2006
Flexural Strength	Under Concentrated Load: 7 MPa	BS EN 12372 : 2006
Abrasion Resistance	24mm	BS EN 14157 : 2017
Water Absorption	5.5%	BS EN 13364 : 2008
Slip Resistance	79 DRY (Sawn Finish)	BS EN 14231 : 2003
	68 WET (Sawn Finish)	

Cleaning & Maintenance

All stones vary and each one should be assessed on an individual basis. Many are slightly alkali so acidic cleaners/cleaning solutions should be avoided. For further information please contact our technical department.