


## Woodhouse Moor

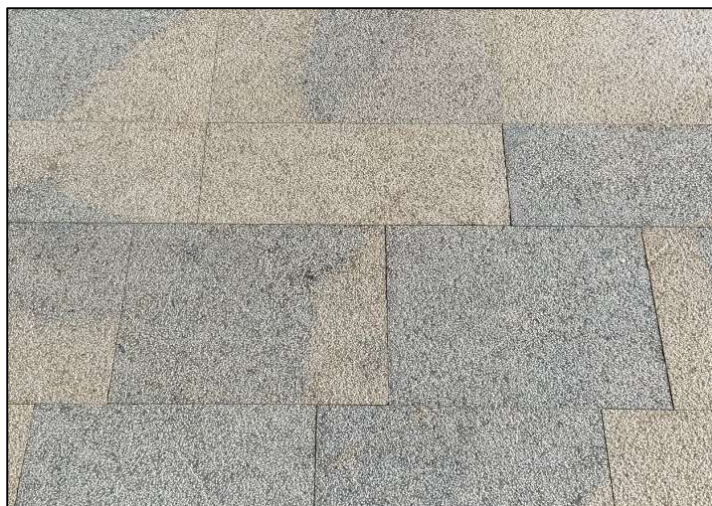

### PRODUCT DESCRIPTION

|                                          |                                                                                                                      |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| <b>Appearance</b>                        | Light brown with crystalline texture                                                                                 |
| <b>Petrographic Description</b>          | Sedimentary                                                                                                          |
| <b>Quarry Location</b>                   | Turkey                                                                                                               |
| <b>Available Finishes</b>                | Sawn, Fine Picked, Flamed                                                                                            |
| <b>Governing Manufacturing Standards</b> | All data where relevant to be established in accordance with BS EN 1341 : 2002, BS EN 1342 : 2012, BS EN 1343 : 2012 |

### PHYSICAL PROPERTIES

|                                      |                             |                    |
|--------------------------------------|-----------------------------|--------------------|
| <b>Work Dimensions (mm)</b>          | To Customer's Specification |                    |
| <b>Tolerances on Dimensions (mm)</b> | Class 2                     |                    |
| <b>Material Density</b>              | 2709 kg/m <sup>3</sup>      | BS EN 1936 : 2006  |
| <b>Compressive Strength</b>          | 168 MPa                     | BS EN 1926 : 2006  |
| <b>Flexural Strength</b>             | 19.5 MPa                    | BS EN 12372 : 2006 |
| <b>Abrasion Resistance</b>           | 17.38mm                     | BS EN 14157 : 2017 |
| <b>Water Absorption</b>              | 0.16%                       | BS EN 13755 : 2014 |
| <b>Slip Resistance</b>               | 40.1 Dry                    | BS EN 14231 : 2004 |
|                                      | 37.9 Wet                    | BS EN 14231 : 2004 |

### Cleaning & Maintenance

All stones vary and each one should be assessed on an individual basis. Many are slightly alkali so acidic cleaners/cleaning solutions should be avoided. For further information please contact our technical department.